


SLITTE DI AVANZAMENTO IDRAULICHE CON PATTINI A SFERE
HYDRAULIC SLIDE UNITS, WITH BALL BEARING WAYS
UNITES D'AVANCE HYDRAULIQUES AVEC PATINS A BILLES
HYDRAULISCHEN LINEARKUGELSCHLITTEN
MESAS DESPLAZABLES HIDRÁULICAS CON PATIN DE BOLAS


ORDERING REFERENCES

HS25/D

GRANDEZZA SIZE GRANDEUR BAUGRÖÙE TAMAÑO	CORSA STROKE COURSE VORSCHUB CARRERA	SPINTA STRENGTH POUSSEE SCHUBKRAFT EMPUJE	PESO WEIGHT POIDS GEWICHT PESO	A	B				
	mm	35 bar	kg~	mm	mm	C	Co	MI	Mt
HS25/D	120	5900N	32	43	165	70	90	3000	2500
HS25/E	200		36	20,5	285				
HS25/F	300		46	50,5	345				
HS25/G	400		58	28	465				
HS25/L	600		70	35,5	645				
HS40/E	200	9800N	90	73	289	90	120	6000	5500
HS40/F	300		105	103	349				
HS40/G	400		120	68	469				
HS40/L	600		150	63	649				
HS40/N	800		180	58	829				
HS60/G	400	17000N	200	88	453	120	160	8000	5000
HS60/H	500		210	30,5	533				
HS60/L	600		230	90,5	653				
HS60/N	800		260	93	853				

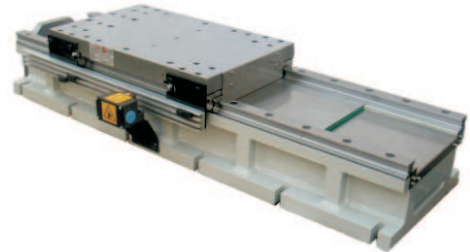

70

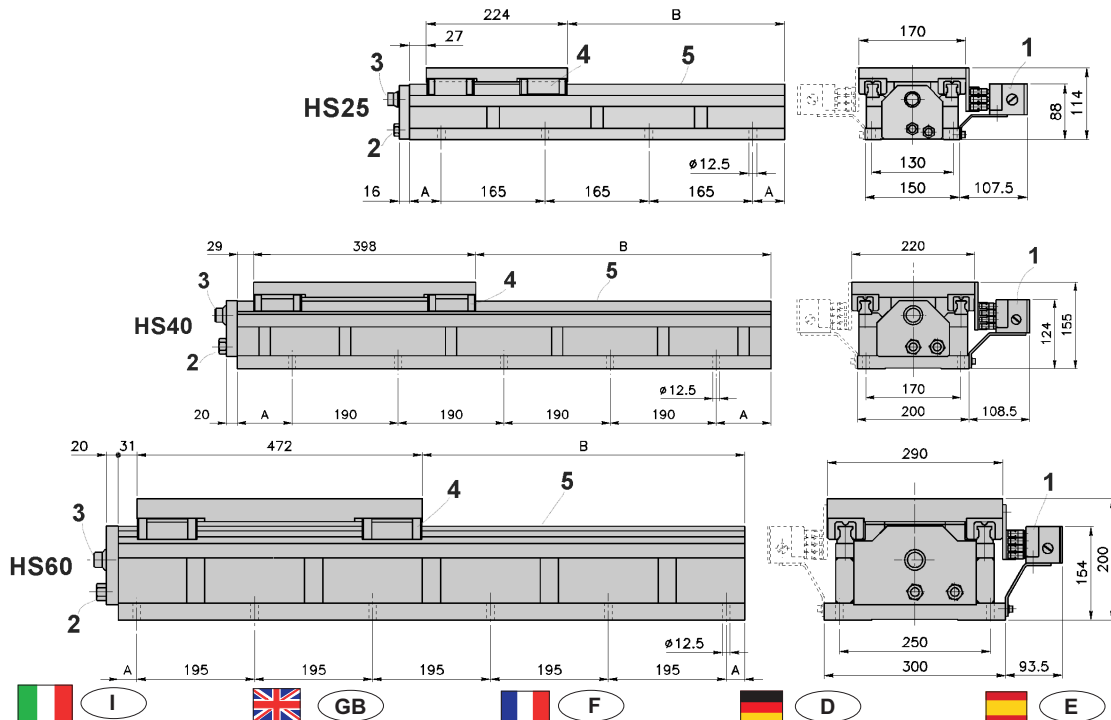

1	Fine corsa elettrico a 3 contatti. Fino a 6 contatti a richiesta. Montato sul lato SX o DX.	3 position cam switch. Up to 6 contacts on request. Mounting on L.H. or R.H. Side.	Boîtier multicontact 3 pistes pouvant être monté à droit ou à gauche. (option jusqu'à 6 pistes).	Elektrischer Endschalter 3 Spuren rechts oder links montierbar. Bis zu 6 Spuren erhältlich.	Interruptores eléctricos 3 contactos. Hasta 6 contactos a solicitud. Montados sobre el lado izquierdo o derecho.					
2	Cilindro idraulico raccordi Andata Ritorno	HS25 HS40 HS60 ø50 ø63 ø80 G1/4 G3/8 G3/8 cm² 17,1 25,0 38,9 cm² 19,6 31,1 50,2	Hydraulic cylinder Hydr. ports Fonw.area Retract	HS25 HS40 HS60 ø50 ø63 ø80 G1/4 G3/8 G3/8 cm² 17,1 25,0 38,9 cm² 19,6 31,1 50,2	Vérin hydraulique raccordements Sect. aller Sect.retour	HS25 HS40 HS60 ø50 ø63 ø80 G1/4 G3/8 G3/8 cm² 17,1 25,0 38,9 cm² 19,6 31,1 50,2	Hydraulik Zylinder Ölanschluss Vorschub Rückhub	HS25 HS40 HS60 ø 50 ø63 ø80 G1/4 G3/8 G3/8 cm² 17,1 25,0 38,9 cm² 19,6 31,1 50,2	Cilindro hidráulico conexiones Sec.avance Sec.retrato	HS25 HS40 HS60 ø50 ø63 ø80 G1/4 G3/8 G3/8 cm² 17,1 25,0 38,9 cm² 19,6 31,1 50,2
3	Arresto meccanico regolabile in avanzamento.	Adjustable mechanical advance stop	Boutée mecanique avant réglable.	Endanschlag einstellbar	Parada de tope ajustable					
4	4 ingrassatori per pattini a sfere sui 2 lati.	4 grease nipples on both side for ball slides	4 graisseurs des 2 côtés pour patins à billes.	4 Schmierstellen für Linearkugelschlitten	4 engrasadores a los dos lados por los patins de bolas					
5	Protezione scorrevole anteriore. (Telescopica a richiesta).	Front protection steel cover. (Telescopic way cover on request).	Protection avant coulissante. (Telescopique sur demande).	Vordere Abdeckbleche - (Teleskopabdeckung auf Anfrage).	Protecciones metálicas. (Telescopicas a solicitud).					
	Colore Grigio RAL 7038	Color grey RAL 7038	Couleur gris RAL 7038	Farbe hellgrau RAL 703 8	Color gris RAL 7038					

70